



# TYPICAL CROSS SECTION

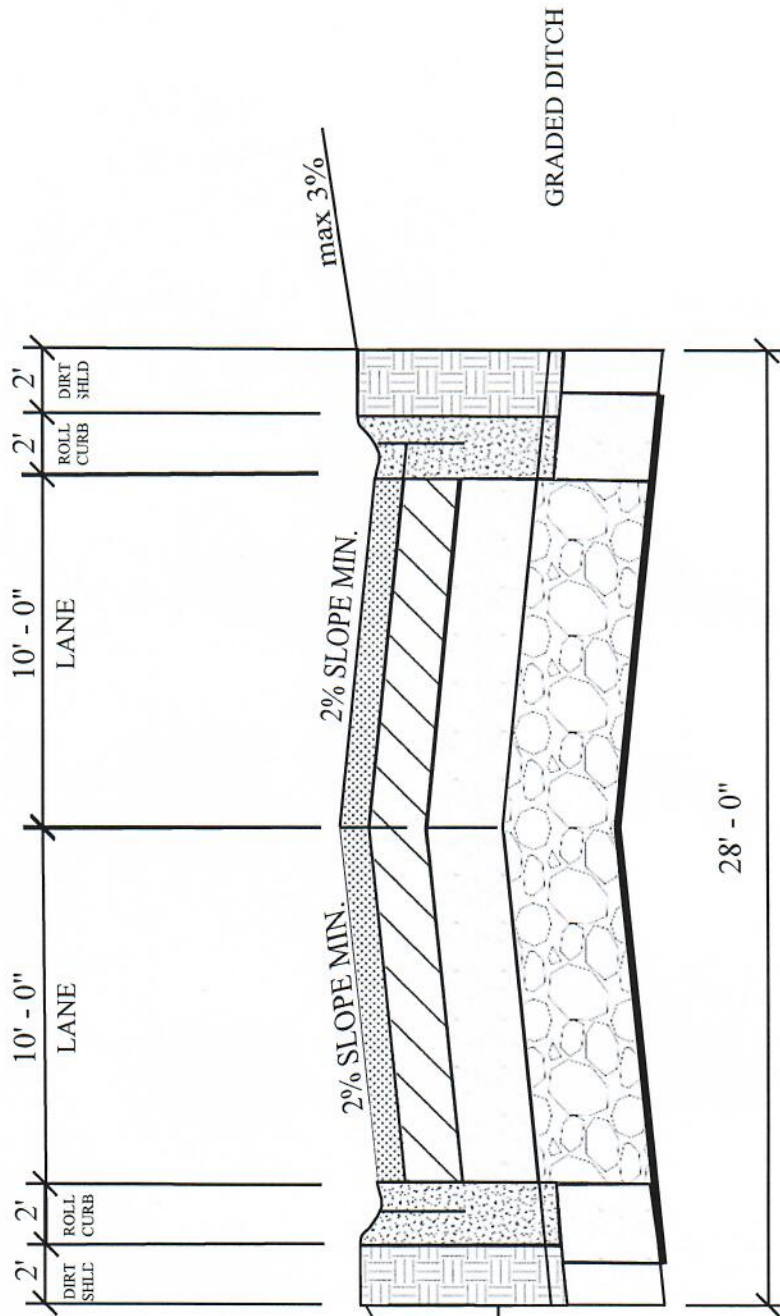

COMPACTED  
EARTH BACK FILL  
COVERED W/ SEED OR SOD

Spencer County Subdivision Regulations

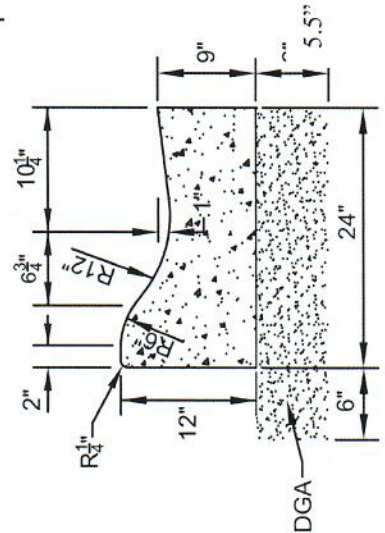

STANDARD ROLL CURB

## Notes

1. Developer may use cement stabilization or lime stabilization to remediate subgrade if necessary.
2. Geotextile Fabric will be placed under the 2.5' of DGA on each side of the roadway in addition to under the 20' of #3 Stone.
3. The concrete mix used for curbing shall be 4,000 psi.

## PAVEMENT DESIGN

- 1.5" ASPHALT SURFACE
- 3" ASPHALT BASE
- 4" DENSE GRADED AGGREGATE
- 6" #3 STONE
- KYTC TYPE II GEOTEXTILE FABRIC